



Xperience

IP2 COMPACT

dynamic traffic light

- Multifunctional solution
- Flexible symbol display
- Space-efficient design
- Easy to programm and to control

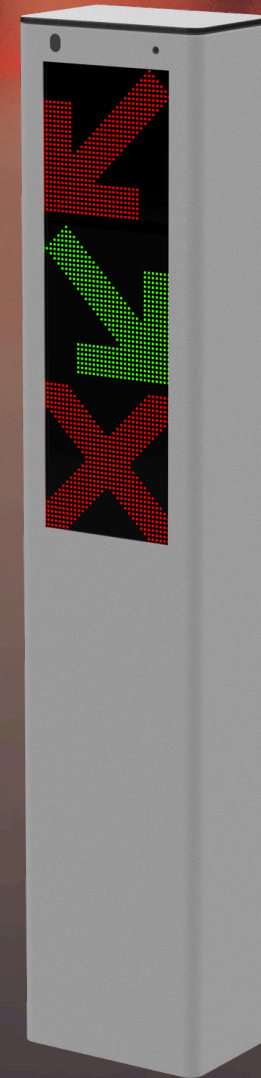

IP2 COMPACT dynamic traffic light

The IP2 Compact Dynamic Traffic Light is a versatile and programmable solution designed for various applications. It can function as a:

- Full Sign
- Lane Signal
- Fire Alarm Indicator

The key advantage of this unit is its flexibility. Unlike traditional systems that require multiple units, the Dynamic Traffic Light can serve multiple functions with just one unit, capable of displaying six different symbols managed within ParkBase. Within the IP2 Compact housing, up to three dynamic traffic lights can be added. The units of the traffic light can also be individually mounted to the ceiling, wall or pole.

Standard

- Dynamic traffic light single-dual-triple unit
- Aluminium housing with anti-corrosion treatment and powder coat finish
- Terminal door with cylinder lock
- Housing in RAL9007 and RAL9004

Optional

- LED contour lighting
- Raised base (300mm)
- Metal-frame foundation
- Housing in RAL color of choice
- Bracket for individual mounting on wall, ceiling, or pole
- Sun screen for single unit


Dimensions

IP2 Compact housing

- 1368 (H) x 275 (W) x 185 (D) mm
- 53,86 (H) x 10,83 (W) x 7,28 (D) inch

Individual traffic light

- 215,4 (H) x 214 (W) x 105 (D) mm
- 8,48 (H) x 8,43 (W) x 4,13 (D) inch

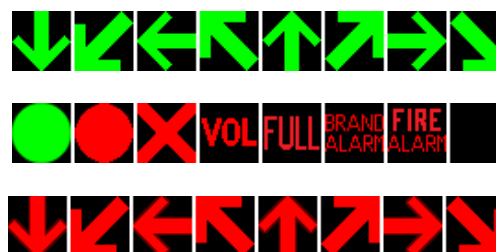

Individual unit
with sunshade

