




IPPARKING

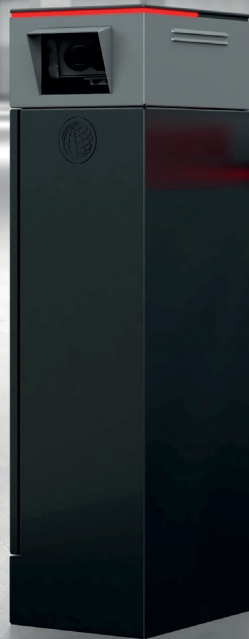

# IP-BARRIER GATE S

- LED lighting in boom arm and top cover
- License Plate Recognition integrated
- Suitable for high frequency use
- Movement time (open-close) 1.9 sec.
- Can be applied double-sided



MOTION TIME  
1,9 SEC.




POWER SUPPLY  
100-240 VOLT



MAX. CONSUMPTION  
322VA



TEMPERATURE  
-30°C TO + 50°C  
-86.00°F TO 122.00°F



NOISE LEVEL  
≤ 60 DB (A)



WEIGHT  
~ 70KG  
~ 154LB



AIR HUMIDITY  
MAX. 95%

## STANDARD

- Aluminum arm
- Double bearing
- Rubber impact profile
- Advanced control logic
- Mechanical lock
- Triple vehicle detection
- Steel housing (2mm)
- Anti-corrosion treatment
- Six programmable outputs
- Color RAL 9007 and RAL 9004

## OPTIONAL

- LED traffic light in barrier arm
- LED traffic light in barrier hood
- License plate recognition integrated
- Housing in RAL color of your choice
- Aluminum folding arm
- Automatic opening in the event of a power failure
- Housing in stainless steel
- Steel foundation
- Shelter

## DIMENSIONS

