

Xperience

IP-BARRIER

gate s

- LED lighting in boom arm and top cover
- License Plate Recognition integrated
- Suitable for high frequency use
- Movement time (open-close) 1.9 sec.
- Can be applied double-sided



IP-BARRIER gate s



Motion time

1,9 sec.



Power supply

100-240 volt



Max. consumption

322 va



Temperature

-30°C to +50°C
-86°F to 122°F



Noise level

≤ **60** db (a)



Weight

~70 kg
~154 lb



Air humidity

max. **95** %


Standard

- Aluminum arm
- Double bearing
- Rubber impact profile
- Advanced control logic
- Mechanical lock
- Triple vehicle detection
- Steel housing (2mm)
- Anti-corrosion treatment
- Six programmable outputs
- Color RAL 9007 and RAL 9004

Optional

- LED traffic light in barrier arm
- LED traffic light in barrier hood
- License plate recognition integrated
- Housing in RAL color of your choice
- Aluminum folding arm
- Automatic opening in the event of a power failure
- Housing in stainless steel
- Steel foundation
- Shelter

Dimensions

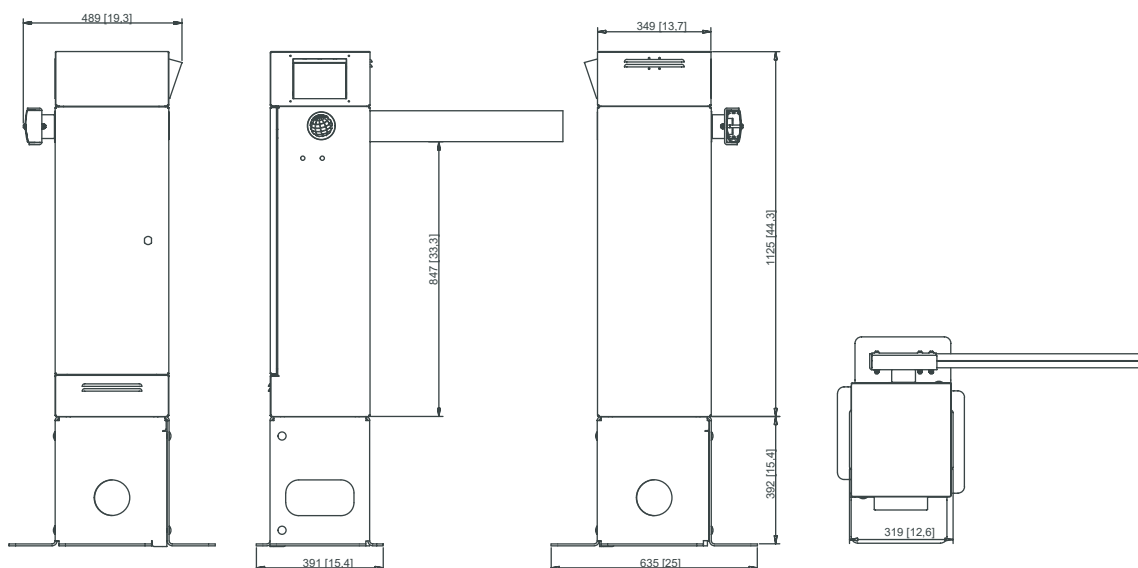

CE FC ISO IEC

Manufactured to UL standard