



- Efficient access control
- Seamless integration
- Streamlined design
- Versatile mounting
- Indoor & outdoor usage
- 100% web-based

IP2 ACCESS *standard*

IP2 ACCESS *standard*

Xperience efficient access control for a.o pedestrian doors and speedgates with the IP2 ACCESS *standard*. Designed in line with the IP2 series, and offering seamless integration with various readers en user interfaces. The IP2 ACCESS *standard* has three versatile mounting styles: Full flush, Semi flush, and Wall mount, while the front-facing cabinet ensures seamless and hassle-free maintenance.

Standard

- IP2 line housing including contour light for Semi flush and Wall mount
- IP2 line housing without contour light for Full flush
- 7" TFT touch screen
- Front door with cylinder lock
- Housing in RAL9004 and RAL9007
- Aluminium housing with anti-corrosion treatment and powder coat finish

Optional

- Barcode (1D) and QR code (2D) open air scanner
- Multi tech prox card reader
- Intercom
- Pinhole camera
- RAL color at choice

Dimensions

Semi flush / Wall mount:

- 514.3 (H) x 345 (W) x 176.5 (D) mm
- 20.25 (H) x 13.58 (W) x 6.95 (D) inch

Full flush

- 487.3 (H) x 345 (W) x 176.5 (D) mm
- 19.19 (H) x 13.58 (W) x 6.95 (D) inch



Semi flush | Wall mount



Full flush



Power supply

110 - 230 VAC

0.58 - 0.3 A



Max. consumption

70 VA






Weight

~ 11 KG

~ 24,25 LB

IP2 ACCESS *standard*

Semi flush | Wall mount

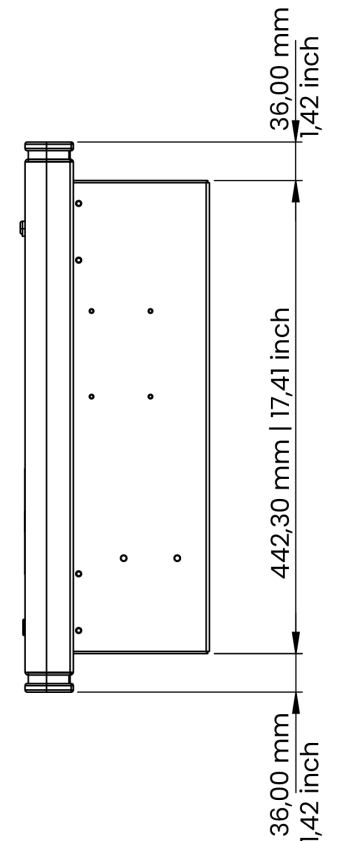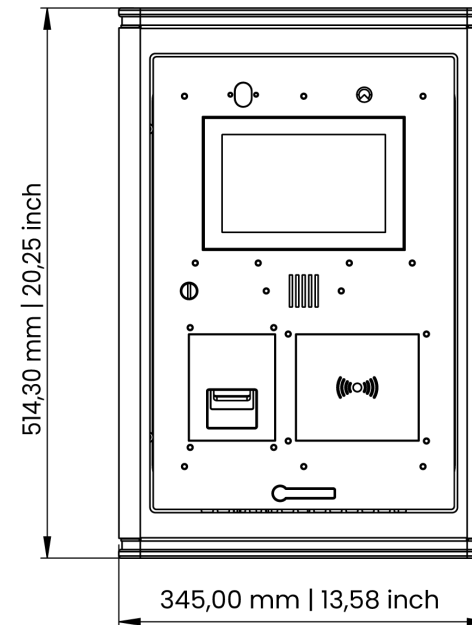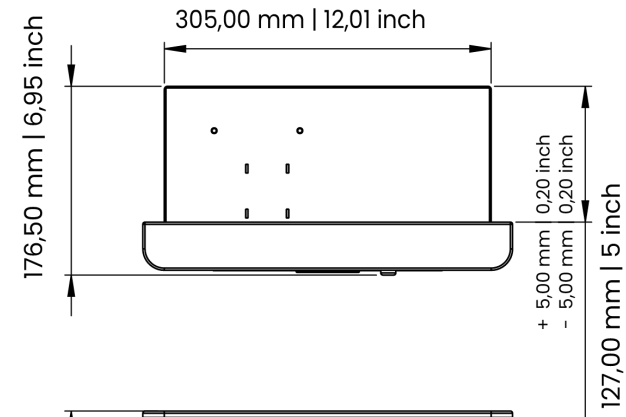

IP2 ACCESS *standard*

Full flush

