



- Effortless access control
- Compact solution
- Streamlined design
- Validation by contour light
- Indoor & outdoor usage
- 100% web-based

# IP2 ACCESS *small*

# IP2 ACCESS *small*

**X**perience effortless access control for a.o pedestrian doors and speedgates with the IP2 ACCESS *small*. Designed in line with the IP2 series, but in a very compact version. The red/green contour light confirms the validation of access. It's your indoor and outdoor solution when facing restricted installation options or space constraints. The IP2 Access is powered by the IP ACCESS Control Box.

## Standard

- IP2 line housing with base in RAL9007
- Contour lighting with access validation in green / red
- Wall mount
- Aluminium housing with anti-corrosion treatment and powder coat finish

## Optional

- Barcode (1D) and QR code (2D) open air scanner
- Multi tech prox card reader
- Intercom
- RAL color at choice

## Dimensions

- 186 (H) x 175 (W) x 110.6(D) mm
- 7.32 (H) x 6.89 (W) x 4.35 (D) inch



Power supply

**110 – 230 VAC**  
**0.8 – 0.55 A**



Max. consumption

**88 – 126.5 VA**




Weight

**~1,95 KG**  
**~ 4,3 LB**




# IP2 ACCESS *small*

## Drawings

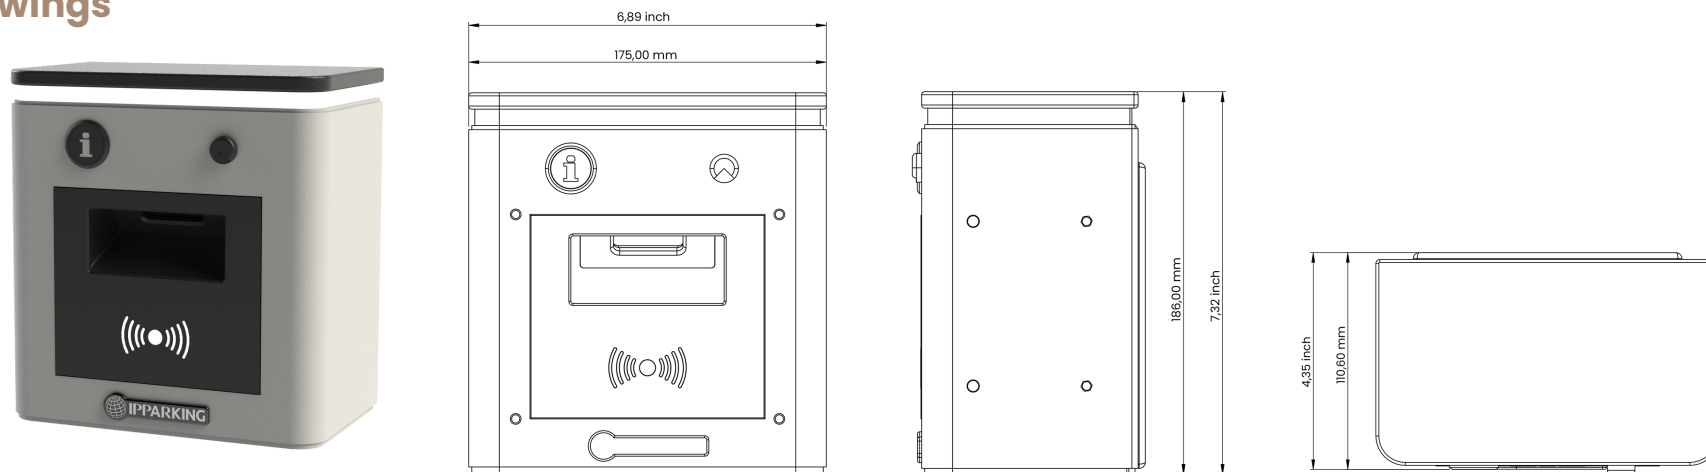

## Technical diagram

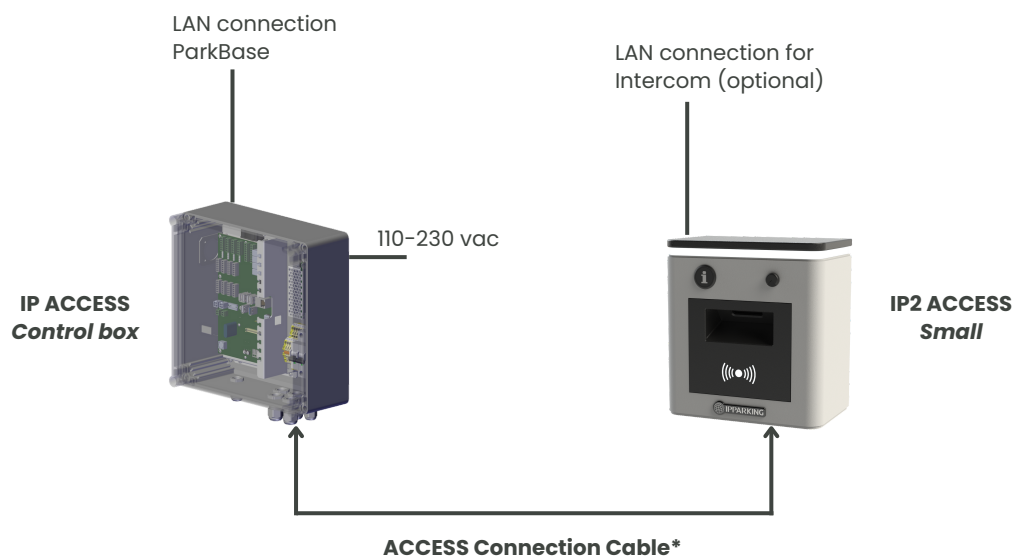

### \* ACCESS Connection Cable

- 16 x 0.34mm<sup>2</sup> LAPP | 0044716
- Double the yellow wire with gray/pink wire
- Double the green wire with red/blue wire

OR:

- 6x2x0.8mm<sup>2</sup> or 12x0.8mm<sup>2</sup>.
- Be aware color code is different from scheme.
- Wires do not have to be doubled.

Maximum cable length between IP ACCESS Control box and IP2 ACCESS small is 15 meters / 49,21 feet